

# SPALDING SPECIFICATIONS

DATE: 01/01/06

**MODEL NUMBER:** 413001

**DESCRIPTION:** SUPERGLASS PRO SB

## **SPECIFICATIONS:**

Backboard shall have a finished regulation size of 42" x 72".

The backboard contains ½" tempered glass.

FIBA approved.

Frame is 5/16" 6063T6 Anodized aluminum frame pre-drilled for Easy Bolt padding. The Superglass Pro Frame is a 2" x 3" square aluminum frame which bolts behind the glass along the bottom of the backboard frame. The channel is reinforced with three ribs for additional strength. The rim bolts pass through and bolt to this channel to make this backboard unbreakable. The patented sub-frame mounting design prevents the rim from ever touching the glass.


The goal mounting pattern is 5" x 4". The backboard mounting pattern is 63" x 36 1/2".

The face of the glass shall be clear of all steel plates. The target and 2" border are fired into the glass for a longer lasting finish.

Mounting pedestals are machined from solid steel for a 3/8" bolt. The pedestals are encased in plastic and fixed in place with snap rings.

The backboard has an unconditional lifetime warranty. Practice, game, intramural and recreational play is covered, supervised or unsupervised. Vandalism, acts of Nature, and outdoor use are not covered.

**SHIPPING WEIGHT:** 215 lbs.

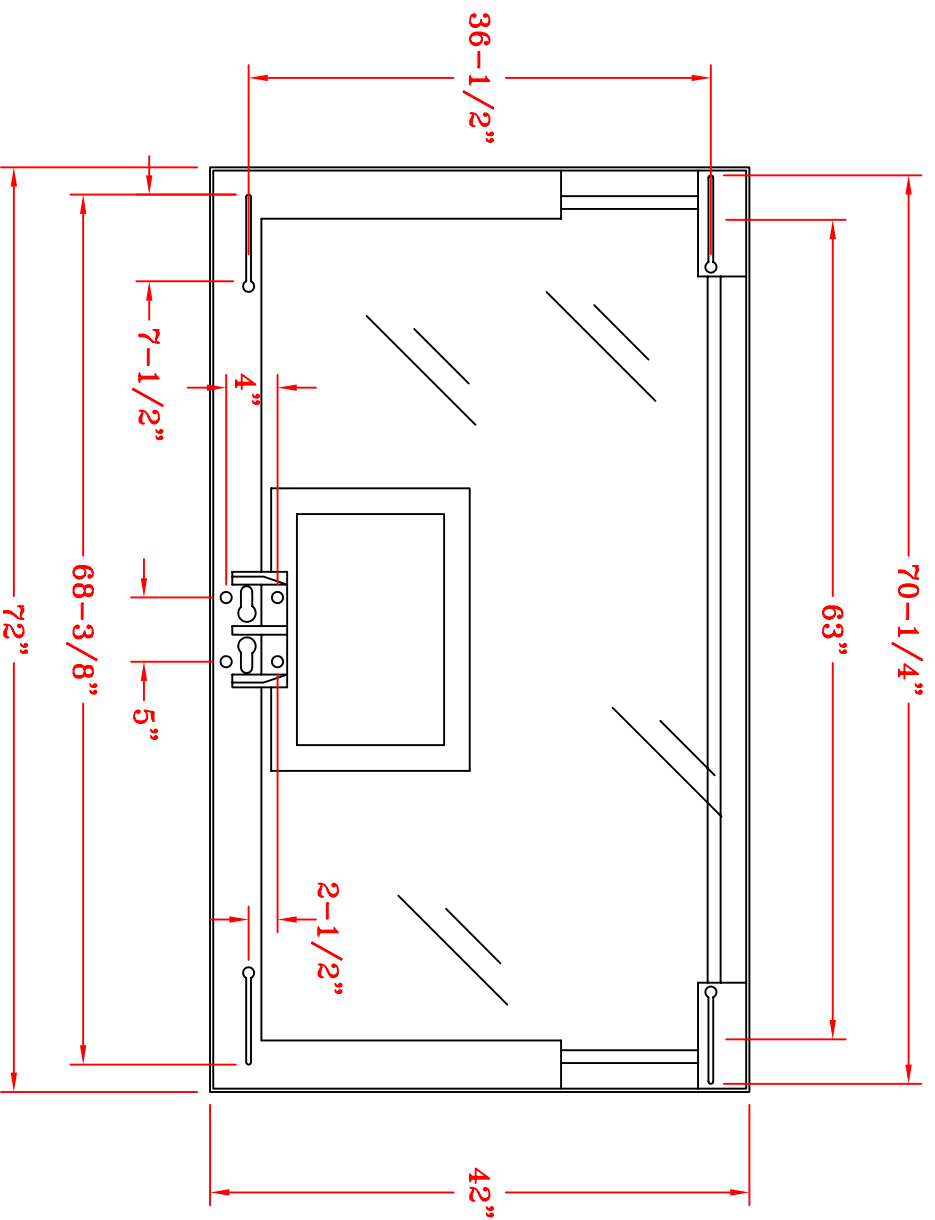

NOTE: TOP PLANE OF RIM IS 1" ABOVE  
UPPER MOUNTING HOLES OF RIM.

**SUPER GLASS PRO SB**  
**TEMPERED GLASS BACKBOARD**

DO NOT SCALE

SCG 0413001

